

FILE PROJECTOR POWER 150W



DESCRIPTION:

The Power 150W floodlight provides powerful and efficient sports lighting, specially designed for outdoor environments. Its robust and durability-oriented construction makes it an ideal solution for demanding installations and industrial areas.

It integrates state-of-the-art LED technology, optimizing energy consumption while ensuring high performance.



- The electrical box and luminaire feature an independent structure.
- PC lens optics providing high visual comfort and uniform light distribution.
- Overall protection rating IP67 and IK10.
- Surge protection up to 10 kV.
- Highly resistant to rain and other atmospheric conditions.
- Easy aiming and orientation during installation.
- Polyester powder coating resistant to UV rays and corrosion.
- No photobiological risk (no risk associated with infrared, blue light, or UV radiation) in accordance with EN 62471:2008.
- External screws made of 304 stainless steel.

STANDARDS AND APPLICATIONS

- | | | |
|---------------------------|----------------------|---------------------------------------|
| • EN 60598-1:2015 | • EN 61000-3-3: 2014 | • EN 61547: 2009 |
| • EN 62493: 2010 | • EN 62262: 2002 | • EN 13032-4 |
| • EN 55015: 2013 | • EN 60598-2-3:2003 | • EN 62471: 2008 |
| • EN 50102:1995 + A1:1998 | • EN 61000-3-2: 2014 | • EN 61347-1 |
| • EN 61347-2-13 | • EN 60598-2-5 | • EN 60231:2008 + A1:2013+
A2:2015 |

Specially efficient in:

- | | |
|-----------------|-----------------|
| • Soccer Fields | • Sports Center |
| • Sports Fields | • Parking Lots |

CHARACTERISTICS

Electrical Characteristics

- Input voltage..... 230 Vac
- Input frequency..... 47–63 Hz
- Power factor..... 0.98
- Electrical class..... Class I / Class II
- Programmable current..... 0.825 – 1.4 A
- LF output current ripple..... N/A
- Constant Light Output (CLO)..... N/A
- Driver..... Invertronics / Mean Well
- Power..... 150W
- Electrical protection..... 6 kV (driver), optional 10 kV
- Thermal protection..... Self-protected driver
- HF output current ripple..... N/A
- Operating temperature..... -40°C to +70°C
- Driver diagnostics..... N/A
- Driver lifetime..... 100,000 hours

Mechanical Characteristics

- Material..... Stainless steel
- Lenses..... Polycarbonate / PMMA
- Weight..... 5.6 kg
- Installation..... Yoke mount
- Wind surface area (module)..... 0.0728 m²
- Dimensions..... 280 × 260 × 120 mm

Dimming and Programming

- Dimming..... 1–10V / DALI
- Autonomous programming..... Programmable
- Point-to-point control..... Compatible
- Centralized dimming..... PWM
- Control Line..... Yes
- Bluetooth dimming..... Optional

Options

- *SRI*..... N/A
- *Surge Protection*..... N/A
- *Connector*..... N/A
- *Sensors*..... N/A


Photometric Characteristics

- Light source..... Nichia High Power
- LED luminous efficacy..... 145 lm/W
- Luminous flux..... 21750 lm
- CRI..... CRI >80
- Protection..... Yes
- Lens efficiency..... >92%
- LED lifetime..... >100,000 hours
- Color temperature..... 3000K / 4000K / 5000K
- Overheating protection..... N/A
- Optical distributions.. 15° / 30° / 60° / 90° / Asymmetric
- ULOR (Upward Light Output Ratio)..... <0.1%
- Lumen maintenance..... Linear programmed over time (CLO)

* The photometric values shown are subject to slight variations resulting from configuration factors such as the optics used in the luminaire or operating temperature.


** For other configurations or required power ratings, please contact the factory.

DIMENSIONS

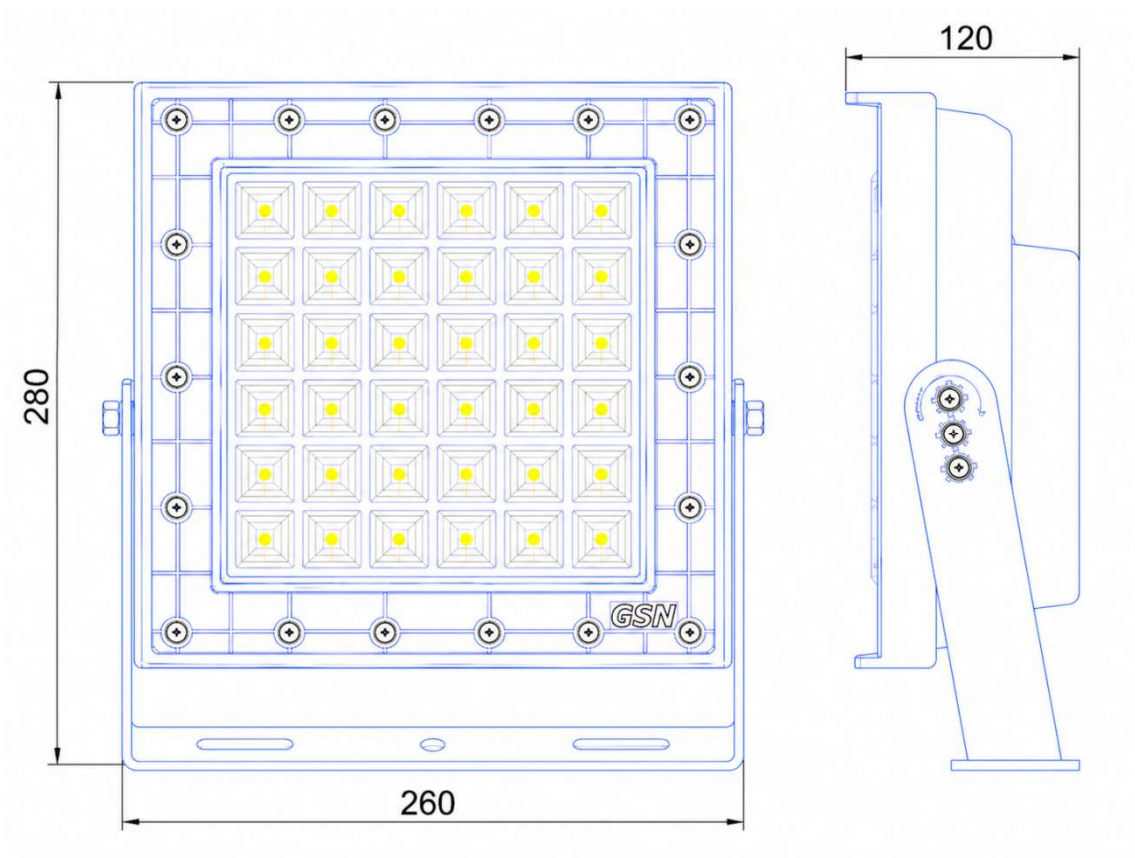


OPTICAL DISTRIBUTIONS


15°

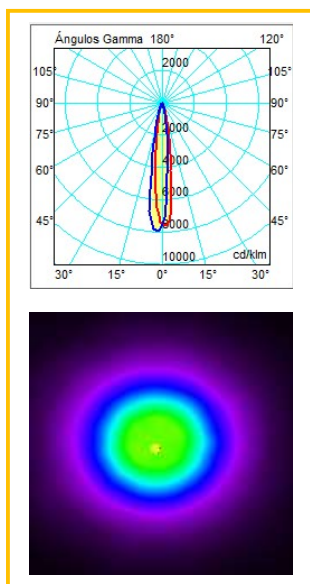


30°

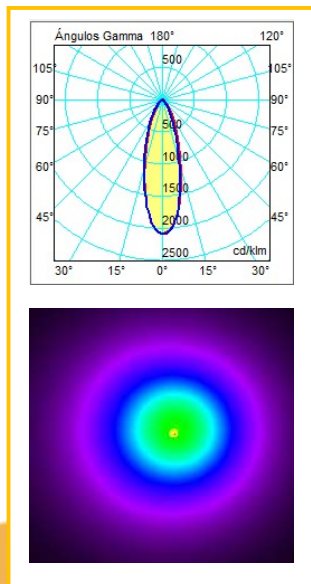

60°

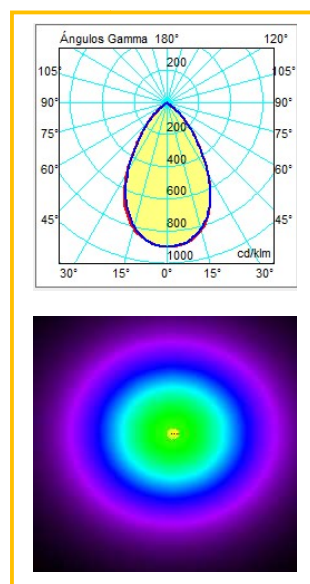

90°

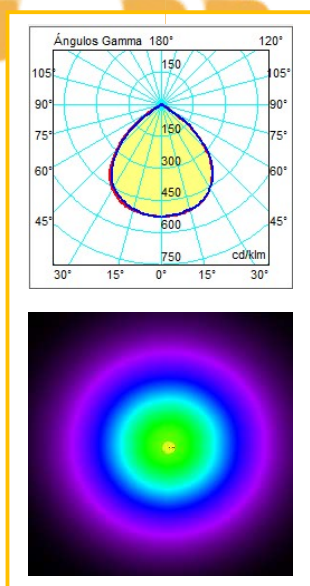

ASIMETRÍC

