

LED Lighting Manufacturers



We shape the light



We shape the light



Ruviser[®]





Our Company

Page 4



Our Services

Page 5



Families

Page 7



Products

Page 8-21



Smart City

Page 22



Contact

Page 24



About Us

At **ASVITAE**, we develop LED lighting solutions for public spaces, combining technology, efficiency and design.

We offer sustainable, efficient and bespoke solutions, ranging from the development and manufacture of lighting fixtures to engineering, technical consultancy and smart management systems.

ASVITAE is part of the **ASVITAE Group**, alongside a number of specialist brands:

ASV LED

Systems and solutions for street lighting.

ASN LED

High-power LED spotlights for high-impact applications.

LUMILIGHT

Interior lighting solutions for commercial and architectural spaces.

RUVISER

Remote management and smart lighting control systems.

In short, our manufacturing work in the lighting sector is characterised by its technical, innovative and quality-focused approach.





Lighting Engineering and Technical Consultancy

We combine science and technology to create efficient and attractive lighting solutions. We optimise visual comfort and energy efficiency through bespoke systems that enhance both indoor and outdoor spaces. We integrate advanced LED technology and smart control systems to deliver innovative, high-performance projects.



Economic studies

We carry out comprehensive economic studies to ensure the viability and success of every project. We analyse costs, benefits and risks using robust methodologies and accurate data, providing key information to help make decisions, identify opportunities, reduce risks and maximise return on investment.



Engineering, development and manufacturing

We are renowned for our excellence in engineering, development and manufacturing. Our multidisciplinary team designs innovative products and solutions that meet the highest technical and aesthetic standards. From conceptualisation through to implementation, we guarantee high performance, quality and durability.



Quality assurance

We guarantee the quality and durability of our products and services through a comprehensive warranty covering manufacturing defects and performance issues. We carry out rigorous quality controls at every stage, from the selection of materials through to delivery, and offer support to ensure customer satisfaction.







Street Lights



Classic Light Fittings




Urban Lighting



Optical Blocks



Projectors

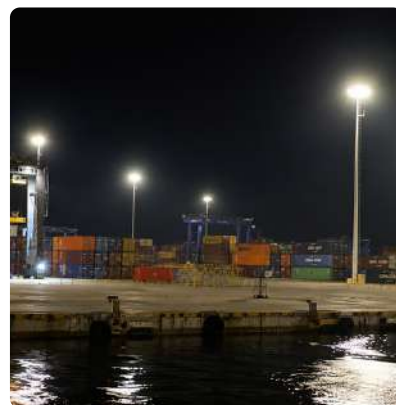

Marinos y ATEX



Solar lights



RGBW



Architectural



Bollards



Columns



Smart City

Jom S



⚡ <40 W | ↔ | 570 x 180 x 100 mm

9007 KG 3.4 kg IP66 IK 09

Jom L



⚡ <120 W | ↔ | 675 x 295 x 101 mm

9007 KG 7.2 kg IP66 IK 09

Aries S



⚡ <40 W | ↔ | 514 x 250 x 130 mm

9007 KG 5.15 kg IP66 IK 09

Aries M



⚡ <120 W | ↔ | 636 x 303 x 148 mm

9007 KG 6.65 kg IP66 IK 09

Picture



⚡ <60 W | ↔ | 555 x 320 x 65 mm

9005 KG 8.3 kg IP66 IK 10

Tauro S2



⚡ <40 W | ↔ | 520 x 200 x 106 mm

9007 KG 4.8 kg IP66 IK 10

Tauro S



⚡ <60 W | ↔ | 540 x 250 x 110 mm

9007 KG 6.3 kg IP66 IK 10

Tauro M



⚡ <120 W | ↔ | 640 x 290 x 110 mm

9007 KG 7 kg IP66 IK 10

Tauro L



⚡ <200 W | ↔ | 794 x 325 x 110 mm

9007 KG 10 kg IP66 IK 10

ARA S



⚡ <60 W | ↔ | 641 x 281 x 97 mm

9007 KG 5.50 kg IP66 IK 09

ARA M



⚡ <120 W | ↔ | 718 x 311 x 103 mm

9007 KG 7.50 kg IP66 IK 09

All luminaires in this section feature: Class I/II · Colour temperatures of 2200 / 2700 / 3000 / 4000 K / AMBER · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming · and over 20 optics available · for other options, please contact the manufacturer.

Alba



⚡ <75 W | 590 x 590 x 598 mm

9005 11.5 kg IP66 IK 09

Fernandino



⚡ <75 W | 500 x 500 x 850 mm

9005 10 kg IP66 IK 09

Pescador F



⚡ <60 W | 400 x 400 x 450 mm

9005 12 kg IP66 IK 09

Pescador KL



⚡ <60 W | 560 x 560 x 410 mm

9005 3 kg IP66 IK 09

Villa



⚡ <75 W | 440 x 440 x 766 mm

9005 5.85 kg IP66 IK 09

Villa Mini



⚡ <40 W | 300 x 300 x 640 mm

9005 4 kg IP66 IK 09



All luminaires in this section feature: Class I/II · Colour temperatures of 2200 / 2700 / 3000 / 4000 K / AMBER · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and over 20 optics available · for other options, please contact the manufacturer.

Carina



⚡ <60 W | 500 x 500 x 235 mm
 RA 9007 KG 7.95 kg IP66 IK 09

Libra



⚡ <60 W | 475 x 475 x 530 mm
 RA 9005 KG 6.95 kg IP67 IK 09

Orion



⚡ <72 W | 630 x 480Ø x 185 mm
 RA 9005 KG 13.5 kg IP66 IK 09

Padle



⚡ <40 W | 521 x 360Ø x 95 mm
 RA 9007 KG 5.95 kg IP66 IK 09

Plate



⚡ <100 W | 672 x 490Ø x 91 mm
 RA 9005 KG 8.5 kg IP66 IK 10

Plate 7



⚡ <100 W | 565 x 490Ø x 84 mm
 RA 9005 KG 8.5 kg IP66 IK 10

Plate Y



⚡ <100 W | 490 x 490 x 610 mm
 RA 9005 KG 9.5 kg IP66 IK 10

Velay



⚡ <75 W | 682 x 530Ø x 158 mm
 RA 9005 KG 12.05 kg IP66 IK 09

Yate



⚡ <75 W | 482 x 482 x 618 mm
 RA 9003 9007 KG 12.5 kg IP66 IK 09

Trex Column



⚡ <75 W | 1000 x 200 x 8000 mm
 RA 9005 KG 7.5 kg IP66 IK 10

Trex Double



⚡ <100 W | 1000 x 200 x 8000 mm
 RA 9005 KG 7.5 kg IP66 IK 10

Wall Trex



⚡ <75 W | 900 x 100 x 100 mm
 RA 9005 KG 1 kg IP66 IK 10

All luminaires in this section feature: Class I/II · Colour temperatures of 2200 / 2700 / 3000 / 4000 K / AMBER · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and over 20 optics available · for other options, please contact the manufacturer.

Optical Block Trex 8 Leds



⚡ <27 W | 125 x 60 x 152 mm

9005 KG 1.00 kg IP66 IK 10

Optical Block Trex 16 Leds



⚡ <40 W | 125 x 60 x 160 mm

9005 KG 1.25 kg IP66 IK 10

Optical Block Trex 32 Leds



⚡ <75 W | 125 x 60 x 260 mm

9005 KG 1.85 kg IP66 IK 10

Optical Block 24 Leds



⚡ <60 W | 190 x 50 x 265 mm

9005 KG 1.75 kg IP66 IK 10

Optical Block 32 Leds



⚡ <75 W | 190 x 44 x 316 mm

9005 KG 2.05 kg IP66 IK 10



All luminaires in this section feature: Class I/II · Colour temperatures of 2200 / 2700 / 3000 / 4000 K / AMBER · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming · and over 20 optics available · for other options, please contact the manufacturer.

Prasa S



⚡ <100 W | 282 x 73 x 405 mm
 9022 KG 4.50 kg IP66 IK 09

Prasa M



⚡ <150 W | 385 x 81 x 490 mm
 9022 KG 7.00 kg IP66 IK 09

Prasa L



⚡ <220 W | 460 x 94 x 595 mm
 9022 KG 13.40 kg IP66 IK 09

Prasa Mini 220W



⚡ <220 W | 151 x 270 x 215 mm
 9005 KG 5.00 kg IP66 IK 10

Prasa Mini 440W



⚡ <440 W | 290 x 270 x 335 mm
 9005 KG 9.00 kg IP66 IK 10

Prasa Mini 660W



⚡ <660 W | 400 x 270 x 450 mm
 9005 KG 13.65 kg IP66 IK 10

Prasa Mini 880W



⚡ <880 W | 385 x 270 x 631 mm
 9005 KG 18.2 kg IP66 IK 10

Prasa Mini 1320W



⚡ <1320 W | 400 x 550 x 450 mm
 9005 KG 22.75 kg IP66 IK 10

Prasa Mini 1720W



⚡ <1720 W | 680 x 550 x 710 mm
 9005 KG 27.3 kg IP66 IK 10

Prasa Sport 80W



⚡ <80 W | 70 x 110 x 270 mm
 9007 KG 3.5 kg IP66 IK 10

Prasa Sport 100W



⚡ <100 W | 170 x 130 x 255 mm
 9007 KG 3.5 kg IP66 IK 10

Prasa Sport 150W



⚡ <150 W | 120 x 260 x 280 mm
 9005 KG 5.60 kg IP66 IK 10

All luminaires in this section feature: Class I/II · Colour temperatures of 2200 / 2700 / 3000 / 4000 / 5000 K / AMBER · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming · and over 20 optics available · for other options, please contact the manufacturer.

Prasa Sport 300W



⚡ <300 W | 160 x 280 x 285 mm

RA 9005 KG 7.3 kg IP66 IK 10

Prasa Sport 660W



⚡ <660 W | 170 x 530 x 340 mm

RA 9005 KG 17.9 kg IP66 IK 10

Prasa Sport 1000W



⚡ <1000 W | 170 x 790 x 340 mm

RA 9005 KG 24.8 kg IP66 IK 10

Prasa Sport 1500W



⚡ <1500 W | 170 x 530 x 650 mm

RA 9007 KG 34 kg IP66 IK 10



The Prasa Sport and Mini projectors in this section feature: Class I/II · Colour temperatures of 3000 / 4000 / 5000 K · Compatibility with point-to-point control · 1-10 V / DALI dimming and 5 available optics · for other options, please contact the manufacturer.

Marino 80W



⚡ <80 W | 70 x 110 x 270 mm

RA 9007 KG 3.5 kg IP67 IK 10

Marino 100W



⚡ <100 W | 170 x 130 x 255 mm

RA 9007 KG 3.5 kg IP67 IK 10

Marino 150W



⚡ <150 W | 120 x 260 x 280 mm

RA 9007 KG 5.60 kg IP67 IK 10

Marino 300W



⚡ <300 W | 160 x 280 x 285 mm

RA 9007 KG 7.3 kg IP67 IK 10

Marino 660W



⚡ <660 W | 170 x 530 x 340 mm

RA 9005 KG 17.9 kg IP67 IK 10

Marino 1000W



⚡ <1000 W | 170 x 790 x 340 mm

RA 9007 KG 24.8 kg IP67 IK 10

Marino 1200W



⚡ <1200 W | 170 x 530 x 650 mm

RA 9007 KG 34 kg IP67 IK 10

Marino Green 220W



⚡ <220 W | 151 x 270 x 215 mm

RA 9005 KG 5.00 kg IP67 IK 10

Marino Green 440W



⚡ <440 W | 290 x 270 x 335 mm

RA 9005 KG 9.00 kg IP67 IK 10

Marino Green 660W



⚡ <660 W | 400 x 270 x 450 mm

RA 9005 KG 13.65 kg IP67 IK 10

Marino Green 880W



⚡ <880 W | 385 x 270 x 631 mm

RA 9005 KG 18.2 kg IP67 IK 10

Marino Green 1320W



⚡ <1320 W | 400 x 550 x 450 mm

RA 9005 KG 22.75 kg IP67 IK 10

All the spotlights in this section feature: Class I/II · Colour temperatures of 3000 / 4000 / 5000 K / GREEN · Compatibility with point-to-point control via 1-10 V / DALI and 5 available optics · for other options, please contact the manufacturer.

Marino Green



⚡ <1720 W | 680 x 550 x 710 mm

RA 9005 KG 27.3 kg IP67 IK 10

ATEX-II 22



⚡ <100 W | 110 x 270 x 110 mm

RA 9007 KG 3.50 kg IP67 IK 10

ATEX-II 22



⚡ <150 W | 120 x 260 x 280 mm

RA 9005 KG 5.60 kg IP67 IK 10

ATEX-II 22



⚡ <300 W | 160 x 280 x 285 mm

RA 9005 KG 7.3 kg IP67 IK 10



All the spotlights in this section feature: Class I/II · Colour temperatures of 3000 / 4000 / 5000K / GREEN · Compatibility with point-to-point control · 1-10 V / DALI dimming and 5 available lens options · for other options, please contact the manufacturer.

Libra



⚡ <12 W | 475 x 475 x 520 mm
 9005 13.7 kg IP66 IK 08

Plate



⚡ <12 W | 672 x 490Ø x 91 mm
 9005 12.20 kg IP65 IK 09

Plate 7



⚡ <12 W | 565 x 490Ø x 84 mm
 9005 12.65 kg IP65 IK 09

Plate Y



⚡ <12 W | 490 x 490 x 610 mm
 9005 13.50 kg IP65 IK 09

Tauro S



⚡ <30 W | 825 x 385 x 145 mm
 9007 19.65 kg IP66 IK 08

Tauro L



⚡ <50 W | 1030 x 415 x 160 mm
 9007 29.50 kg IP66 IK 08

Trex Solar



⚡ <10 W | 205 x 200 x 1020 mm
 9005 3.50 kg IP65 IK 10

Trex Solar 360°



⚡ <10 W | 200 x 125 x 1000 mm
 9005 3.50 kg IP65 IK 10

Street Solar



⚡ <2.5 W | 175 x 190 x 650 mm
 7045 3.30 kg IP66 IK 09



The solar-powered luminaires in this section feature: Class III · Colour temperatures of 3000 / 4000 K · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and 3 available optics · for other options, please contact the manufacturer.

Prasa RGB 150W



⚡ <150 W | 94 x 460 x 595 mm
 RA 9022 KG 8.40 kg IP66 IK 09

Prasa RGB 240W



⚡ <240 W | 108 x 560 x 740 mm
 RA 9022 KG 13.10 kg IP66 IK 09

LINE RGBW



⚡ <30 W | 570 x 67 x 81 mm
 RA 9005 KG 13.50 kg IP67 IK 09

LINE RGBW



⚡ <75 W | 1060 x 67 x 81 mm
 RA 9005 KG 23 kg IP67 IK 09

RUB



⚡ <25 W | 190 x 151 x 205 mm
 RA 9007 KG 2.25 kg IP66 IK 09

CONOS S



⚡ <15 W | 1129 x 129 x 190 mm
 RA 9022 KG 1.35 kg IP66 IK 09

CONOS M



⚡ <40 W | 220 x 220 x 258 mm
 RA 9005 KG 3.70 kg IP66 IK 09

CONOS XL



⚡ <75 W | 268 x 268 x 270 mm
 RA 9005 KG 5.60 kg IP66 IK 09



The projectors in this section feature: Class I/II · RGBW colour temperatures · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · DMX/RGB control and 3 optics available · For other options, please contact the manufacturer.

Conos S



⚡ <15 W | ↔ | 1129 x 129 x 190 mm

RA 9005 KG 1.30 kg IP66 IK 09

Conos M



⚡ <40 W | ↔ | 220 x 220 x 258 mm

RA 9005 KG 3.50 kg IP66 IK 09

Conos XL



⚡ <75 W | ↔ | 268 x 268 x 270 mm

RA 9005 KG 5.60 kg IP66 IK 09

Rub C



⚡ <15 W | ↔ | 150 x 120 x 158 mm

RA 9007 KG 2.20 kg IP66 IK 09

Cubo Screen



⚡ <35 W | ↔ | 135 x 234 x 225 mm

RA 9007 KG 2.20 kg IP66

LINE RGBW



⚡ <30 W | ↔ | 570 x 67 x 81 mm


RA 9005 KG 13.50 kg IP67 IK 09

LINE RGBW



⚡ <75 W | ↔ | 1060 x 67 x 81 mm

RA 9005 KG 23 kg IP67 IK 09

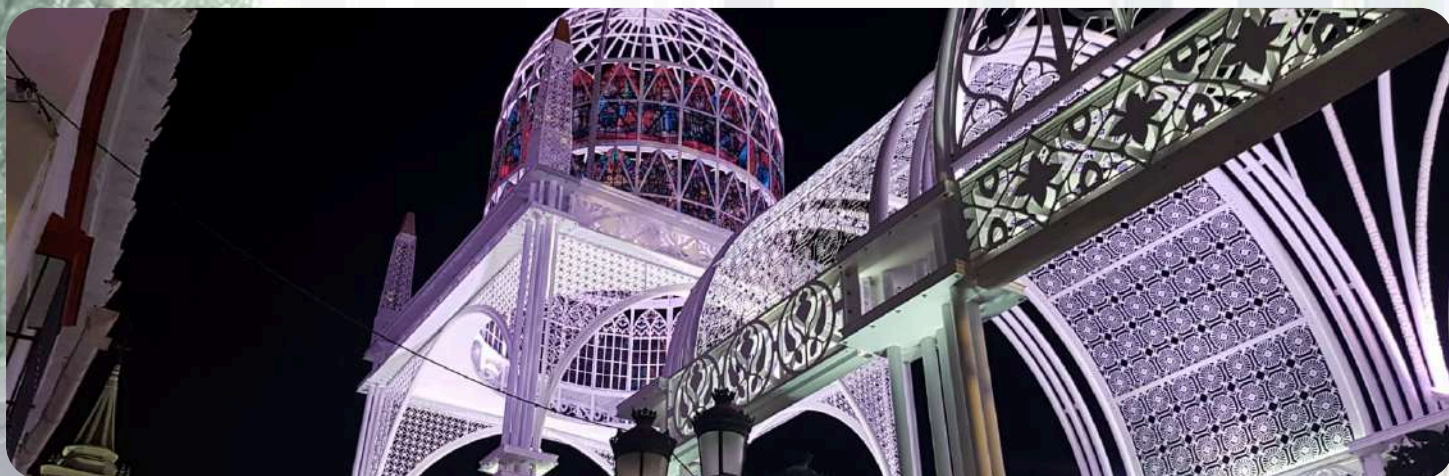

All luminaires in this section feature: Class I/II · Colour temperatures of 2700 / 3000 / 4000K · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and 4 optics available · for other options, please contact the manufacturer.

Trex Solar



⚡ <10 W | 205 x 200 x 1020 mm

9005 3.50 kg IP65 IK 10

Trex Solar 360°



⚡ <10 W | 200 x 125 x 1000 mm

9005 3.50 kg IP65 IK 10

Trex Bollard



⚡ <40 W | 237 x 220 x 1000 mm

9005 3.50 kg IP66 IK 09

Coete



⚡ <25 W | 222 x 222 x 1000 mm

9005 5.60 kg IP66 IK 09

Kuadra



⚡ <15 W | 178 x 178 x 1000 mm

9005 7.70 kg IP66 IK 09

Jura



⚡ <12 W | 118 x 118 x 800 mm

9005 5.25 kg IP66 IK 09

Snik



⚡ <15 W | 118 x 118 x 1000 mm

9007 3.70 kg IP66 IK 09

Street Solar



⚡ <2.5 W | 175 x 190 x 650 mm

7045 3.30 kg IP66 IK 08



All luminaires in this section feature: Class I/II · Colour temperatures of 2700 / 3000 / 4000 K · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and 4 optical options available · for other options, please contact the manufacturer.

Highway



⚡ <50 W | ↔ | 168 x 168 x 4000 mm



9007



25.25 kg



Trex Column



⚡ <75 W | ↔ | 1000 x 200 x 8000 mm



9005



7.5 kg



Trex Column Doble



⚡ <100 W | ↔ | 1000 x 200 x 8000 mm



9005



7.5 kg



Column Snik



⚡ <150 W | ↔ | 168 x 168 x 4500 mm



9007



29 kg



Kuadra Pole



⚡ <60 W | ↔ | 210 x 210 x 6000 mm



9005



99 kg



All luminaires in this section feature: Class I/II · Colour temperatures of 3000 / 4000 K · Compatibility with point-to-point control · Modularity compliant with Zhaga Book 15 · 1-10 V / DALI dimming and more than 10 optics available · for other options, please contact the manufacturer.

Series Basic



S-235-JR | 250 x 60Ø x Z mm
 Editable | From 2,5 m To 4m

Series CE



S-235-JR | 300 x 60Ø x Z mm
 Editable | From 3 m To 12 m

Series AM10



S-235-JR | 300 x 60Ø x Z mm
 Editable | From 4 m To 12 m

Foundry Villa



Hierro | 440 x 92Ø x Z mm
 Editable | From 2 m To 3,6 m

Semi-casting Villa



S-235-JR | 300 x 70Ø x Z mm
 Editable | From 3 m To 4 m

Series Cylinder



S-235-JR | 300 x 100Ø x Z mm
 Editable | From 2 m To 12 m

Wall Brackets



S-235-JR | 300 x 48Ø x L mm
 Editable | From 1m To 1,5m

Crossbar CRA



S-235-JR | 305 x 40 x L mm
 Editable | From 1/2 m To 2 m

Crossbar CRB



S-235-JR | 300 x 60Ø x 400 mm
 Editable

Arms Castilla



S-235-JR | 300 x 60Ø x 500 mm
 Editable

Our columns and wall brackets are manufactured in accordance with UNE-EN 10025 and designed to meet the requirements of UNE-EN 40. They are hot-dip galvanised in accordance with UNE-EN ISO 1461, ensuring a high level of protection against corrosion · for alternative RAL colours, please contact the factory.

Connected lighting, smart management

Remote management transforms lighting into a smart system capable of adapting to the needs of each installation. Remote control, real-time monitoring, light output regulation and automatic fault detection help to reduce costs, optimise energy consumption and maximise the service life of the luminaires.

Our smart lighting system incorporates the following features:



Standard Zhaga interface

It detects the movement of pedestrians and vehicles using microwave technology, enabling the light output to be automatically adjusted. Communication between the luminaires allows information to be passed from one to another, dynamically adapting the lighting in response to detected movement.

Telemanagement

Our smart control platform enables wireless management of LED luminaires via Bluetooth Low Energy (BLE). The devices form a mesh network in which each luminaire communicates with the others, providing a scalable, reliable system that does not require a central controller. It is specifically designed for professional installations such as offices, industrial units, hotels, shopping centres, outdoor lighting and smart buildings.




Point-to-point control

Through our IoT platform, it is possible to monitor and manage the lights connected to the system via a controller, allowing you to check their status and control each device remotely.



LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo
LI2473065WT4B	Activo

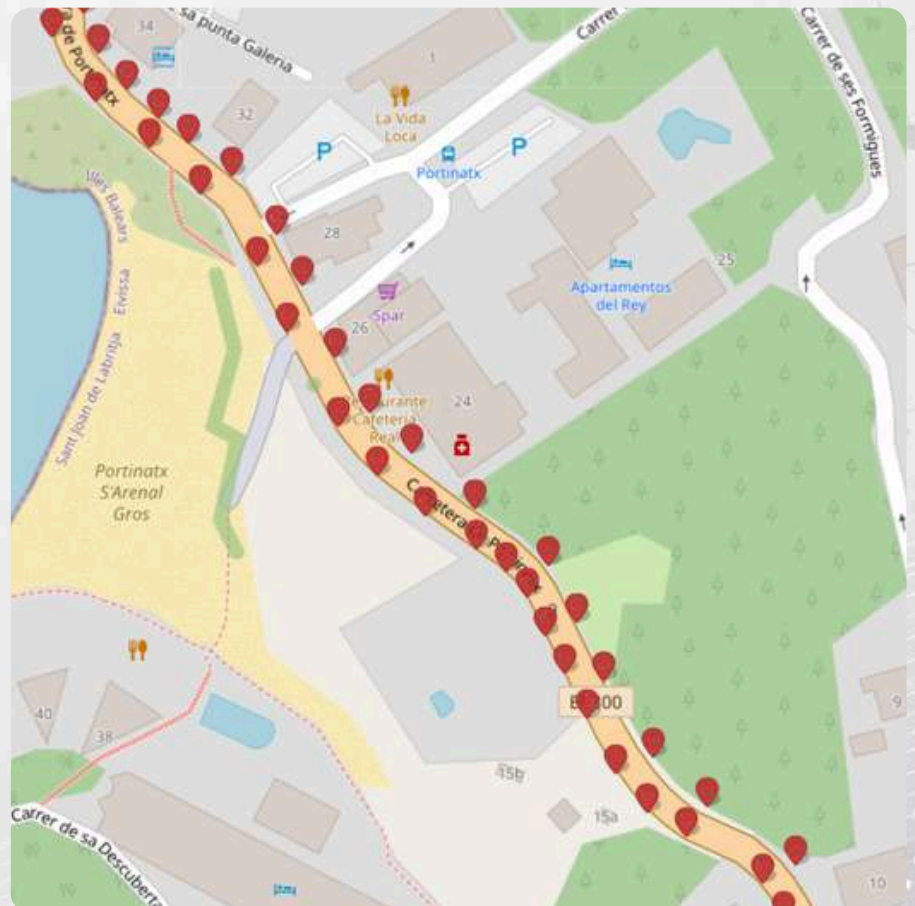

CÓNTACT US



<https://www.asvitae.com/>



C/ La Pau 17
46960 Aldaia,
Valencia



info@asvitae.com



+34 961 815 660



www.asvitae.com

